




Tasman[®] Security Screen Door Lock

FEATURES OF THE TASMAN[®] LOCKING HANDLE

The Tasman[®] provides superior design by coupling a double key locking system along with a handle that is fluid in operation.

- The Tasman[®] utilizes an 18mm deadbolt
- Tasman[®] can be locked from both inside and out via key or snib function. The snib function allows handle to be locked or unlocked quickly without the use of a key. It is important to note that this feature will work only if the door has been initially unlocked with the key. The key operation of the handle overrides the snib function.
- Double Keyed Cylinder

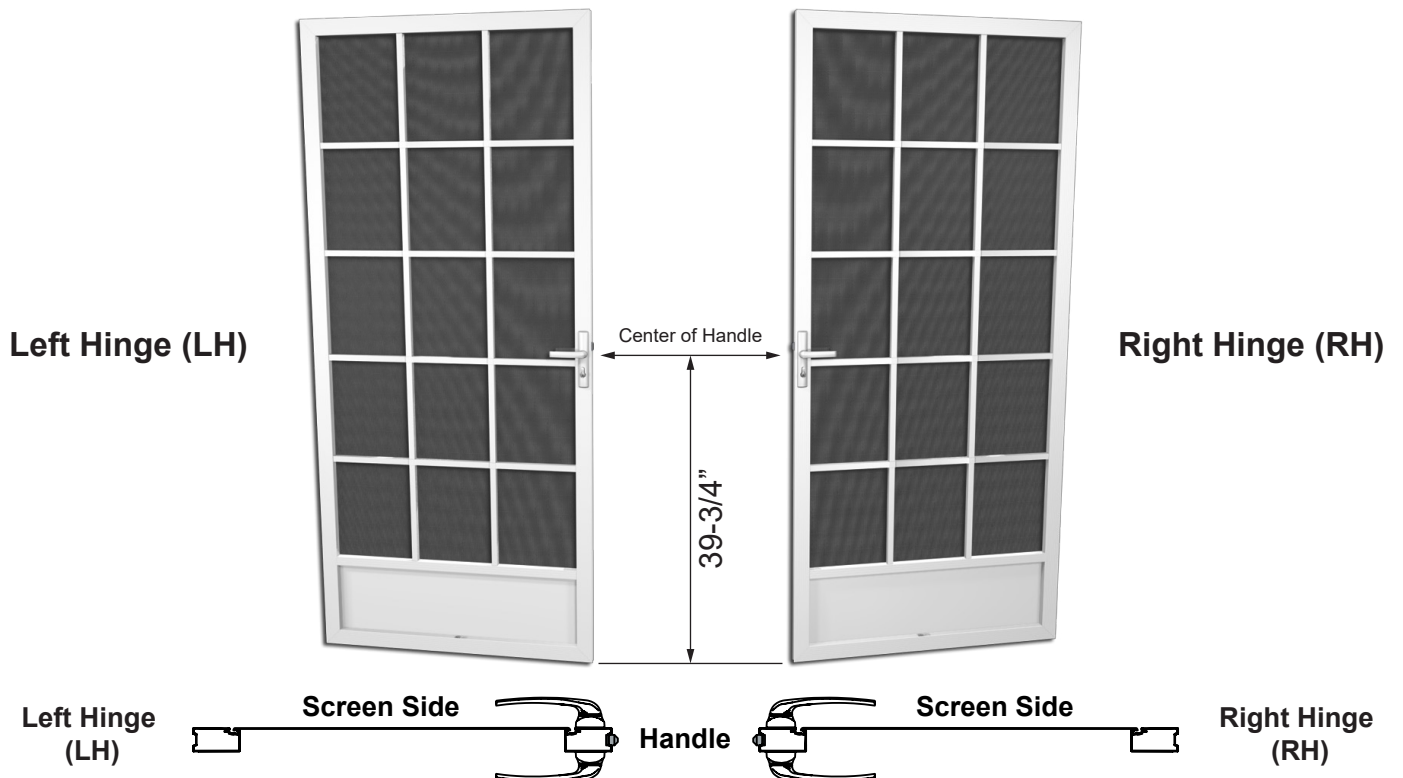

ORDERING INFORMATION

Upon ordering, it is important to **specify the hinge placement in relation to the screen**. See examples above. **Standard placement** of lock on most doors designs is 39-3/4" from the bottom of the door to the center of the handle.

Exception: Certain door designs dictate the position of the lock placement. Tasman[®] lock can be placed at a special height on door as per your request.